


WSM

WORKSHOP MANUAL
TRACTOR

STV32,STV36,STV40

Kubota

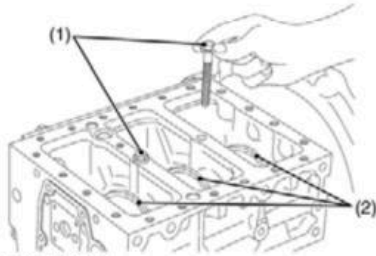


3TLABAB1P030B




3EEADAB1P026A

[A]

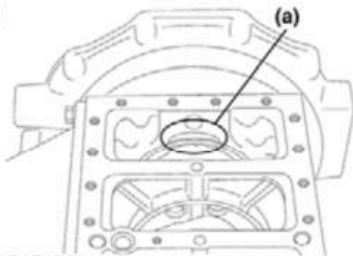


3TLABAB1P031A

[A]

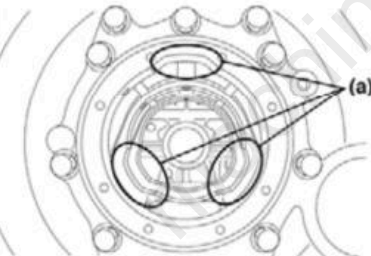

3TLABAB1P032A

[A]

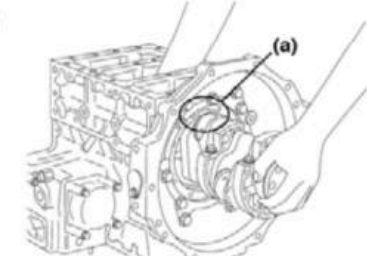

3TLABAB1P033A

Crankshaft

■ **NOTE**

- Before disassembling, check the side clearance of crankshaft. Also check it during reassembling.

For D1503-M, D1703-M

1. Remove the main bearing case screw 2 (1).
2. Pull out the crankshaft assembly, taking care not to damage the crankshaft bearing 1 (3).

For D1803-M

1. Remove the main bearing case screw 2 (1).
2. Turn the crankshaft to set the crank pin of the third cylinder to the bottom dead center. Then draw out the crankshaft until the crank pin of the second cylinder comes to the center of the third cylinder.
3. Turn the crankshaft by 2.09 rad (120 °) counterclockwise to set the crank pin of the second cylinder to the bottom dead center. Draw out the crankshaft until the crank pin of the first cylinder comes to the center of the third cylinder.
4. Repeat the above steps to draw out all the crankshaft.

(When reassembling)

■ **IMPORTANT**

- Install the crankshaft sub assembly, aligning the screw hole of main bearing case 2 (2) with the screw hole of cylinder block.
- When tightening the main bearing case screw 2 (1), apply oil to the screw and screw by hand before tightening the specific torque.


If not smooth to screw by hand, align the screw holes between the cylinder block and the main bearing case.

Tightening torque	Main bearing case screws 2	68.6 to 73.5 N·m 7.0 to 7.5 kgf·m 50.6 to 54.2 ft·lbs
-------------------	----------------------------	---

- (1) Main Bearing Case Screw 2
- (2) Main Bearing Case 2
- (3) Crankshaft bearing 1

- (a) Cut place for removing and installing the crankshaft
- [A] D1803-M


000007506E

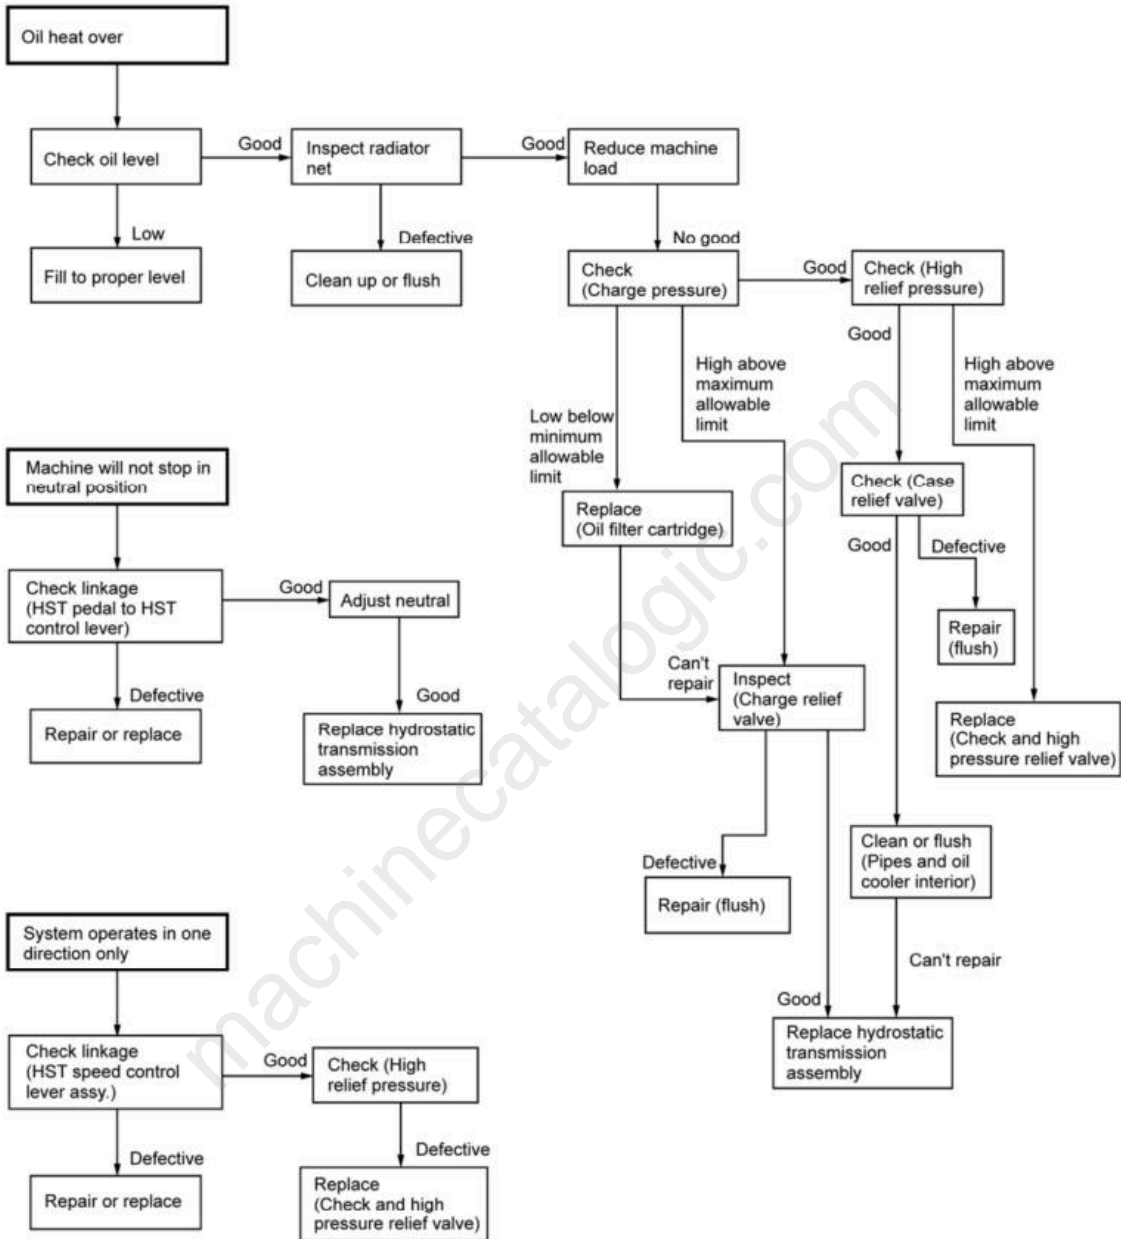

3TGAAAB3P028A

000008031E


(3) Mid Case



3TGAAAC3P067A




3TGAAAC3P068A



3TGAAAC3P069A



3TGAAAC3P070A



3TGAAAC3P087A

Removing Hydraulic PTO Clutch

1. Remove the magnet (3) and inlet pipe (2).
2. Remove the external snap rings (4) (6) and collar (5) on the 24T gear shaft (7).
3. Tap out the 24T gear shaft (7) with the hydraulic PTO clutch assembly (8).

(When reassembling)

- Install the hydraulic clutch assembly (8) so that the stopper (9) enters a range **R**.
- Be sure to fix the magnet (3).

- | | |
|------------------------|-------------------------------|
| (1) Mid Case | (7) 24T Gear Shaft |
| (2) Inlet Pipe | (8) Hydraulic Clutch Assembly |
| (3) Magnet | (9) Stopper |
| (4) External Snap Ring | |
| (5) Collar | |
| (6) External Snap Ring | |

R: Range

0000007579E

3. TIGHTENING TORQUES

Tightening torques of screws, bolts and nuts on the table below are especially specified.
(For general use screws, bolts and nuts : See page G-9.)

Item	N·m	kgf·m	ft-lbs
Joint screw (Power steering delivery hose)	49.0 to 58.8	5.0 to 6.0	36.2 to 43.4
Joint screw (Bi-speed delivery pipe)	34.3 to 39.2	3.5 to 4.0	25.3 to 28.9
Joint screw (Regulator delivery pipe)	39.2 to 49.0	4.0 to 5.0	28.9 to 36.2
Regulator valve mounting screw	17.7 to 20.6	1.8 to 2.1	13.0 to 15.2
Pump cover mounting screw	39.2 to 44.1	4.0 to 4.5	28.9 to 32.5
PTO delivery hose retaining nut	15 to 17	1.5 to 1.75	10.8 to 12.7
Bi-speed delivery pipe retaining nut	30 to 49	3.0 to 5.0	21.7 to 36.2
Bi-speed valve retaining screw	23.5 to 27.5	2.4 to 2.8	17.4 to 20.3
Rod joint screw (steering cylinder)	123.6 to 147.1	12.6 to 15.0	91.1 to 108.5
Position control valve mounting screw	20 to 24	2.0 to 2.4	14.5 to 17.4
Hydraulic cylinder cover mounting screw (M10)	39.2 to 44.1	4.0 to 4.5	28.9 to 32.5
Hydraulic cylinder cover mounting screw (M8)	17.7 to 20.6	1.8 to 2.1	13.0 to 15.2
Relief valve plug	39.2 to 49.0	4.0 to 5.0	28.9 to 36.2

000007809E

Full Version Available

Kubota STV32 Tractor Workshop Manual

This is a short preview. The complete manual contains all chapters, wiring diagrams, torque specifications and full service procedures.

VIEW THE FULL MANUAL

<https://machinecatalogic.com/kubota-stv32-tractor-workshop-manual/>